

STANDARD



Snap Diameter: **8** mm
 Width of Tape: 20mm
 Snap Interval: 40mm
 50mm

Snap Diameter: **10** mm
 Width of Tape: 20mm
 Snap Interval: 50mm


Snap Diameter: **13** mm
 Width of Tape: 25mm
 Snap Interval: 70mm

LINEUP FOR STANDARD ITEMS

SNAP	INTERVAL (mm)	40	50	70
8mm		○ P/C:6795	○ 6695	
10mm			○ 6601	
13mm				○ 7195

SALES UNIT : 50m

Set sale of socket and stud which are rolled separately.



VARIATION

COLOR VARIATION



Color specification is possible for both snap and tape.

COMBINED TYPE OF SOCKET AND STUD



Exclusive use for quilt cover by making circle with stud and socket snapping. The end of tape is cut by heat. Tape width: 15 mm

HEAT RESISTANT




PBT material snap is resistant to heat and chemicals. Available colors are off white and black. Snap is attached to tape one by one. Tape is thick and less flexible type of M tape. M tape width : 20.7mm•25mm.

HARD ACTION

Designed and made to meet the need of HARD on/off action. The snap is made of PBT material which has excellent resistance against heat and chemicals.
 Product name : H SOFIX P10 40SD M580 Black

SPECIAL INTERVAL SOFIX10 20SD3-1 (P/C:0013)

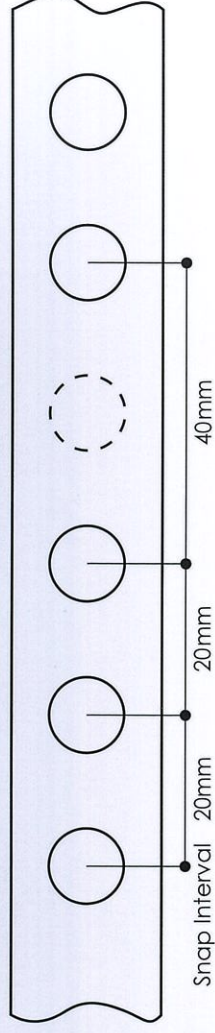

Special interval specification is also available. For more information, please contact YKK Snap Fasteners sales representative. e.g. One snap interval after 3 snaps attached.

COLOR



Other than standard 16 colors, YKK Fasteners colors are available as well. ϕ 8mm • ϕ 10mm • ϕ 13mm • 900m, ϕ 13mm • 650m

LINEUP FOR MASS PRODUCTION EXCEPT STANDARD ITEMS

SNAP	INTERVAL (mm)	20	30	35	40	45	50	70	100	140
8mm			○ 6595	○ 6895		○ 6995		○ 0002	○ 0020	○ 0026
10mm		○ P/C:0021			○ 0028				○ 6495	
13mm							○ 0035		○ 0018	○ 0027

MIN. LOT : ϕ 8mm • ϕ 10mm • 900m, ϕ 13mm • 650m


APPLICATION

For Baby & Children

For Sports & Uniform

For Liner

For Food Factory

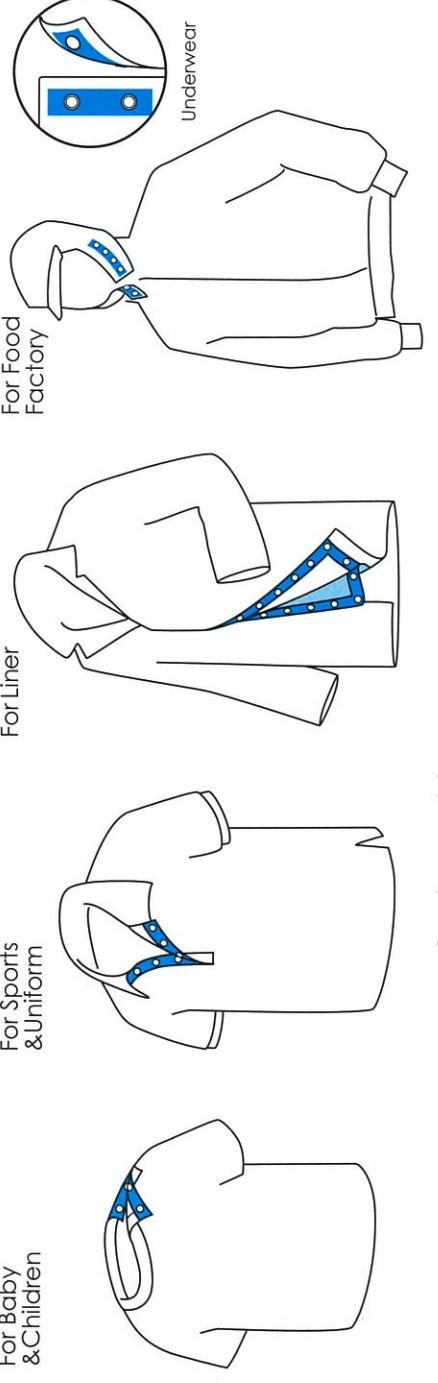

Can be used for wide range of application